




Name: Mini Guard Series
Topology Offline
Phase Single Phase
Power Range 500-2000VA
Application PC, Office, Small Device

KUPS MINI GUARD SERIES

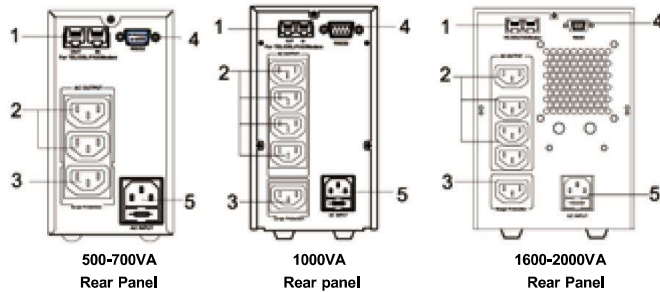

Rear Panel:

- 1- RJ11/RJ45 for Tell/Fax/Modem/Network
- 2- Output Socket
- 3- Surge Protection (p.s. Without Battery Backup)
- 4- RS232 Communication Port
- 5- Inlet With Fuse

Specification

Model		UPS500	UPS700 UPS700L	UPS1000 UPS1000L	UPS1600 UPS1600L	UPS2000 UPS2000L
INPUT	Voltage AC	140~280 / 90~145				
	Frequency Hz	50/60 ±10%				
OUTPUT	Power (VA/W)	500/300	700/420	1000/600	1600/960	2000/1200
	Voltage AC	220±10% / 120±10% (on Battery mode)				
	Frequency Hz	Synchronizing with input AC While it is normal, and 50±0.5% or 60±0.5% on Battery mode				
	Transfer Time	Typical 6 ms, including detection time and switching time (synchronous switch-over)				
BATTERY	Voltage DC	12	12	12/24	36	36
	Battery Type	1×7Ah12V	1×7Ah12V External	2×7Ah12V External	3×7Ah12V External	3×9Ah12V External
	Charge current (A) Max	1	1/8	1/6	1/5	1/5
OTHER	Communication Interface	RS232, RJ11/RJ45 (Dry contacts, USB and SNMP are Optional)				
	Display	LCD Display Show Status of AC input, Inverter, Low Battery, Overload, and Battery Capacity, or LED Indicators Show Status of AC Input, Inverter Low Battery, Overload				
Dimension (W×D×H) mm		90×325×165	90×325×165 120×395×220	120×395×220	156×450×220	
Weight Kg: Standard/long backup		5	5.5/8	11/9	20/13	23/14

- Specifications are subject to change without prior notice.
- 110V, 120V systems are available and with some different parameters.